

CUTTING MACHINE C36 threephase



Dimensions

Effective	105 x 61 x h. 82
On Pallet	110 x 70 x h. 90

Weight

Effective	Kg. 450
On Pallet	Kg. 460

Oil

with viscosity = 220
Kg. 3

Electric Motor

380 Volt
4 HP / 3 KW

Strokes / Minute


90

Cutting capability

R. = 65 Kg. / mm ²			R. = 80 Kg. / mm ²		
1 Ø 30	2 Ø 20	3 Ø 16	1 Ø 26	2 Ø 18	3 Ø 14

As preparation of the machine for the transport, we set it on a pallet (standard measures), cover it with a stiff carton paper and with a cellophane coat, and then fix it with plastic band.

Standard Equipment

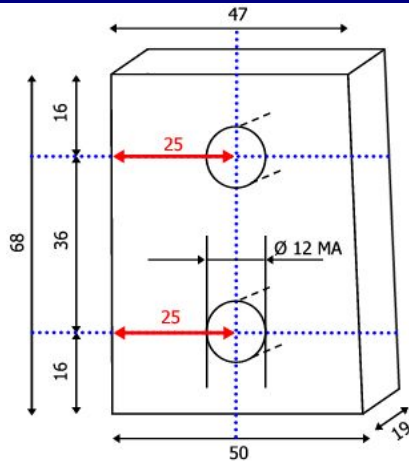

Blades

Two blades in hardened steel already fit on the machine

Optionals



Lubrication Pump

Special manual pump with flow adjuster, for constant and easy lubrication of all the parts liable to seizure. It is easy to use. Simply press the batching cylinder control knob once a day, in case of daily use, and regulate the cutting machine.



dm DELAHENTY MACHINERY PTY. LTD.
Machine Tool Merchants

14 Parkhurst Drive Knoxfield Victoria Australia 3180
Tel: (03) 9800 1544 Fax: (03) 9800 1344
www.delahenty.com.au

OF.ME.R. S.R.L.
Via Emilio Brasca, 137
20056 Trezzo S/Adda (MI) - ITALY
Phone: +39.2.90.90.134
Fax: +39.2.90.96.13.78