


RCE

**3 ROLLS
SYMMETRICAL ROLL BENDING MACHINE**





Capacity : 0,2-4mm – Length : 1-2 m

CE

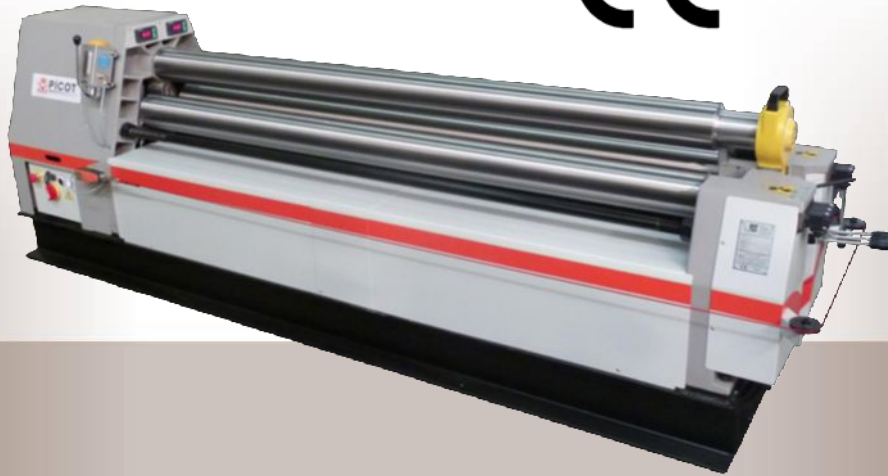

Advantages

- ✓ 100% Hydraulic
- ✓ 3 Rolls driven
- ✓ Double pitch plate bending machine
- ✓ No lamination
- ✓ Wide opening between the rolls
- ✓ Perfect prebended edges
- ✓ Easy cone rolling
- ✓ No pit
- ✓ Calibration of parts



STANDARD EQUIPMENTS

All the technical information for our RCE product can be found in our web site by scanning this flash code.

Look at the photo gallery or watch the video ...



- ✓ 3 rolls driven by independent hydraulic motors
- ✓ Tilting device for prebending rolls
- ✓ Digital displays for controlling the position of prebending rolls
- ✓ Cone device (thrust) for conical bending
- ✓ Automatic and hydraulic synchronization of roll's parallelism
- ✓ Three grooves at 120° on each lower roll (easy positioning of metal sheets)
- ✓ Polished rolls
- ✓ Progressive regulation

3 Rolls	bending length	Top Roll Diameter (D)	*Maximum Thickness (mm)				Motor Power
			1,3 x D		5 x D		
	(mm)	(mm)	Bending	Prebending	Bending	Prebending	Kw
RCE 115-10	1 100	115	3	2,5	3,5	3	2,2
RCE 130-10		130	4	3,5	4,5	4	2,2
RCE 115-15	1 600	115	2,5	2	3	2,5	2,2
RCE 130-15		130	3	2,5	3,5	3	2,2
RCE 115-20	2 100	115	2	1,5	2,5	2	2,2
RCE 130-20		130	2,5	2	3	2,5	2,2

OPTIONS


- ✓ Hardened rolls
- ✓ Central lubrication
- ✓ Proportional control desk with digital indicators



- ✓ Control desk with electronic regulation with or without Numerical Control assistance



- ✓ Bending diameter direct measuring system

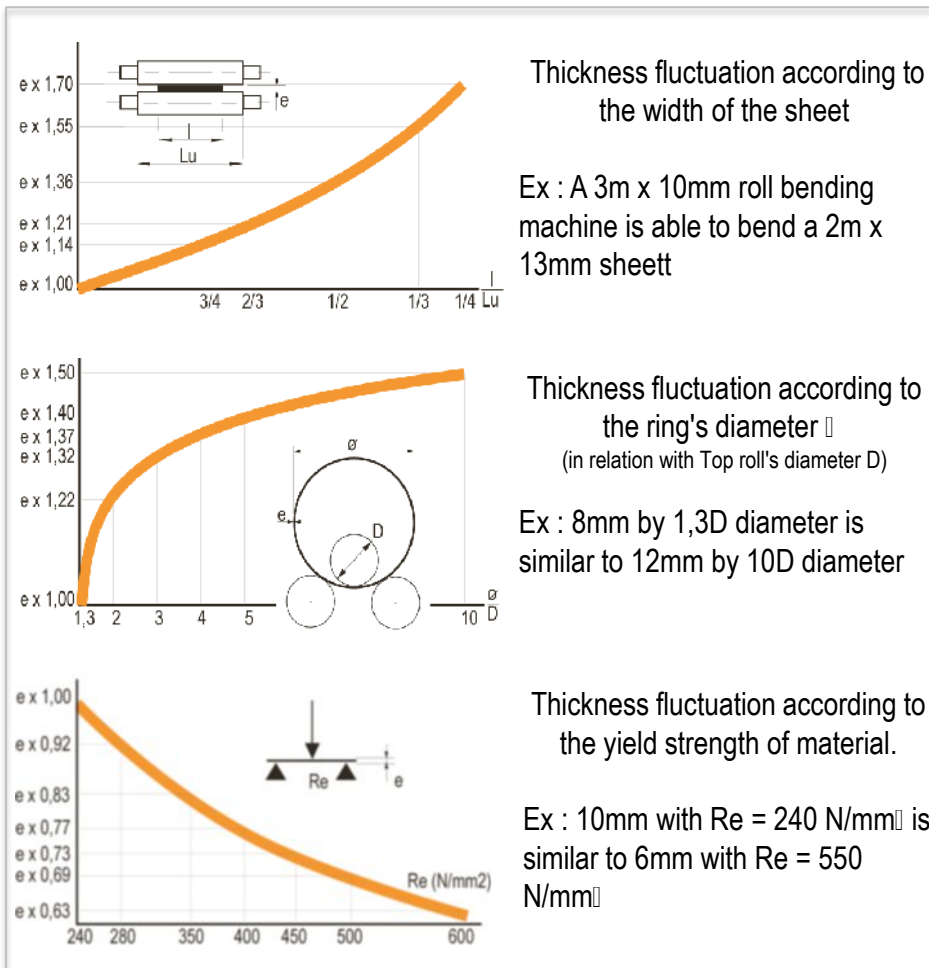

* Technical capacities are given for Steel S 235 (Yield Strength 240 N/mm²)

Your distributor